


# TG 10 Stainless steel

RITTER DATA SHEET



## Technical Drawing

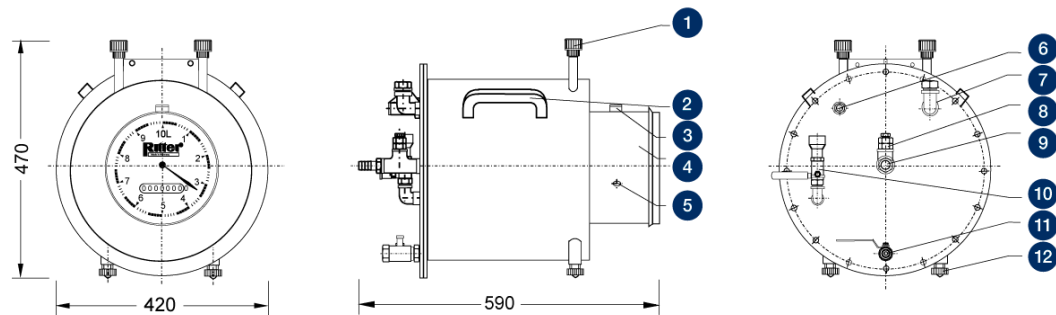

## Legend

1. Support for:
  - > Thermometer (gas)
  - > Thermometer (packing liquid)
  - > Manometer
2. Handle
3. Level
4. Removable cover
5. Puls generator port (option)
6. Gas outlet
7. Filling nozzle
8. Manometer connection
9. Gas inlet
10. Liquid level indicator
11. Drainage faucet
12. Levelling foot

## Performance Data

Minimum flow $Q_{\min}$	20	ltr/h
Standard flow $Q_{\text{standard}}$	1,000	ltr/h
Maximum flow $Q_{\max}$	1,200	ltr/h
Measurement accuracy at standard flow	0.2	%
Measurement accuracy across measuring range	0.5	%
Measuring drum volume	10	ltr/U
Packing liquid quantity, approx	21	ltr

<b>Maximum gas inlet pressure <sup>(1)</sup></b>	<b>500</b>	<b>mbar</b>
Minimum differential pressure <sup>(2)</sup>	0.1	mbar
Minimum dial division	0.1	ltr
Maximum indication value <sup>(3)</sup>	99,999,999	ltr
Connection gas in/outlet	hose barb	
Inside-Ø hose barb	17.2	mm
Outside-Ø hose barb	26	mm

<sup>(1)</sup> Standard version: 500 mbar – special version also available for 1 bar

<sup>(2)</sup> Differential pressure (= pressure loss) gas inlet gas outlet

<sup>(3)</sup> Standard Totalizing Roller Counter

## Models (materials)

Model	Casing	Measuring drum	Width	Height	Depth	Weight (without packing liquid)	Max. constant use temperature
1	Stainless Steel	PVC-grey	420 mm	470 mm	590 mm	25.6 kg	40 °C
2	Stainless Steel	PE-el	420 mm	470 mm	590 mm	25.2 kg	60 °C
3	Stainless Steel	PP-grey	420 mm	470 mm	590 mm	25.2 kg	80 °C
4	Stainless Steel	PVDF	420 mm	470 mm	590 mm	25.8 kg	80 °C

**Caution:** Before and after measurements with oxygen purge the meter with an inert gas to avoid the danger of explosion! For chemical resistance properties please contact your RITTER distribution partner!

## Standard Equipment

- › Multi-Chamber Measuring Drum
- › Magnetic coupling between measuring drum and counter (for an absolutely liquid-tight casing)
- › 8 or 9-digit Totalizing Roller Counter
- › Large One-needle Dial
- › Supports for Thermometer and Manometer
- › Viton sealing
- › Level and Levelling Feet
- › Bubble level for levelling

## Built-in Options

- › **LCD Display**, resettable, 8-digit (replaces Totalizing Roller Counter)
- › **Pulse Generator**, standard or Ex-proof version (for connecting Electronic Display Unit/Computer)
- › **High Precision Packing Liquid Level Indicator »HPLI«**, for packing liquid level

## Accessories

- › **Software »RIGAMO«**
- › **Thermometer Gas (TG)**, measuring range 0 °C to +60 °C
- › **Thermometer Packing Liquid (TG)**, measuring range 0 °C to +60 °C
- › **Manometer for pressure  $p_{max} \leq 1 \text{ bar}$** , measuring range 0-600 mbar
- › **Electronic Display Unit »EDU 32 FP«**, displays volume and calculates flow rate via RS232 and analog-output in realtime (pulse generator required)

V 3.3 / Rev. 2024-02-07 / Subject to alterations.

The most recent version of this data-sheet can be found at ...

<https://www.ritter.de/en/tg-10-stainless-steel/>

Dr.-Ing. RITTER Apparatebau GmbH & Co. KG · Coloniastrasse 19-23 · D-44892 Bochum · Germany

For questions please contact [mailbox@ritter.de](mailto:mailbox@ritter.de) or your local distribution partner ([on our overview page](#))